

Rapid IP68 cable gland 2 entry with push-in &/or screw male & female connector for waterproof fitting and junction box...



PRODUCT COLOR



LIFE TIME AND WARRANTY

Warranty	2 ans
Compliance marking	CE
Inflammable surface compliancy	F

OPTIONS

Color available	Noir [B]; Gris [G]
Cable compatibility	Flexible & rigid
Product family compatibility	DRAKKAR 2 DRAKKAR PRO CALYPSO 2 DRAKKAR TRAVERSANT


GENERAL SPECIFICATION

Family	GENRAD
Nominal voltage	400V
Rated surge voltage	4Kv
Operating temperature range Ta	-35/+65 °C
Insulation material	Polyamide
Contact material	Copper, silver plated
Rubber material	Silicone
Power supply and connection	Push-in&screw connector 3P max 16A Push-in connector 5P max 16A
Connection point per pole	1x hole pole
Contact type (pluggable connector)	Male/Female
Gland tightening torque	2,5nmNm
Strip lenght (outter insulation)	20-25mm
Strip lenght (inner insulation)	6-10mm
Maintenance	H2O; Antistatic tissu
Remarks	Delivery 3in1 push connector-screw connector and end caps

TECHNICAL DATA

Reference	Rated current (A)	Pole and connection	Conductor	Coulor	Cut out	Dimensions (mm)
GENRAD3PB	16	3P push & vis	0.75-2.5mm2	Noir	M20	78x27
GENRAD3PG	16	3P push & vis	0.75-2.5mm2	Gris	M20	78x27
GENRAD5PB	16	5P push	0.5-1.5mm2	Noir	M20	85x27
GENRAD5PG	16	5P push	0.5-1.5mm2	Gris	M20	85x27

2D drawing

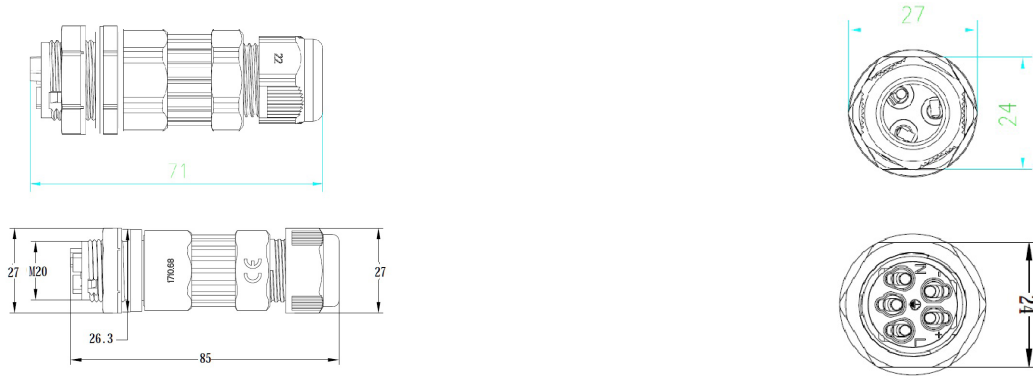

Instruction paper

