



Floor luminaire LED UGR<19 direct / indirect for office, open-space, conference room...



COLOR OF PRODUCT

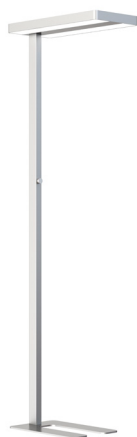

REPARABILITY



WARRANTY



LIFE TIME AND WARRANTY

Nominal norms marking	CE
CE directive	CEI 60598-1 CEI 60598-2-4 : 1997
Security Photobiological	CEI 62471 – : 2008 : RG0

GESTION

Detection mode	- [GRAM] Détecteur PIR 1-10V
Dimming mode	1-10V gradation 20-100%
Interface controlled	Integrated Dimmer [GRAM] 4 function

OPTIONS*

Dimming	IR corridor 1-10V [GRAM]
CCT color temperature	3000K [830] 5000K [850]
Color of product	White [W] Black [B]

*Voir synoptique (onglet ressources du site internet)

CARACTÉRISTIQUES GÉNÉRALES

Product family range	KAZAN SERIES
Product Family	KAZAN
Life time L80B10 at 25°C	50000hrs
Life time L80B10 at Ta Max	35000hrs
Maintenance	Antistatic tissu; Humid tissu
Réparability	Driver : No / Module : No
Input voltage range / Frequency	AC220-240V +/-6% / 50/60Hz
Operating temperature range Ta	Ta : -15/+35°C
Type of source	Module SMD
Brand of sources	LG innotek
Mac Adam index	Mac adam 3
Brand of Driver	BOKE
Cycles on/off	∞
Defective rate Driver at 5000hrs	1%
T.H.D @ full load	< 20%
Ripple current	< 7% flicker free
Surge protection	L-N:1KV L-PG: 2KV N-PG: 2KV
Position driver on fixture	Integrated inside fixture
Body material	Painted steel with epoxy
Diffuser material	Microprismatique Methacrylate
Fixation	U shape installation bracket
Electrical network interface	Connector 3P 16A
Vandal proof	No
Accessories	Mounting fixation set
Remarks	Bright out function, Power and light adjustment based on ambient lux level

TECHNICAL DATA

Product reference	Power (W)	CCT (K)	CRI (Ra)	Beam (°)	Lumen out (lm)	PF	Intensity mA	Color	Dimension (mm)
KAZ60190G-840	2x30	4000	>80	120°	Dir 2700 Ind 3600	0,96	2x700	RAL9006	610x290x1950
KAZ60190G-840GRAM	2x30	4000	>80	120°	Dir 2700 Ind 3600	0,96	2x700	RAL9006	610x290x1950

LOGISTIC DATA

Product reference	EAN	HS code EU	Unit weight (kg)	G.W. (kg)	Qty / CTN (pcs)	Dimension CTN (cm)
{PRODUCT REFERENCE}	{EAN}	{Custom Import Code}	{Net Weight (Kg)}	{G.W./CTN}	{QTY/CTN}	{CARTON BOX L} x {CARTON BOX W} x {CARTON BOX H}

MANAGEMENT

Product reference	Driver brand	Dimming	Protocole
{PRODUCT REFERENCE}	{Driver Ref}	{Dimming}	{Driver protocole compliancy}

PICTURE ACCESSORIES




SENSOR TECHNICAL DATA

Product reference	Standby p (W)	Detection mode	Zoning detection range	Nb éleve(s) (qté)
KAZ60190G-840				
KAZ60190G-840GRAM	<0.5W	IR Présence et luminosité, corridor	H2.1m dia 3.5m	1


SENSOR SETTING

Product reference	Timing	Distance P=Ceiling A=Wall	Timing at low level
KAZ60190G-840			
KAZ60190G-840GRAM	30min	2m	30min

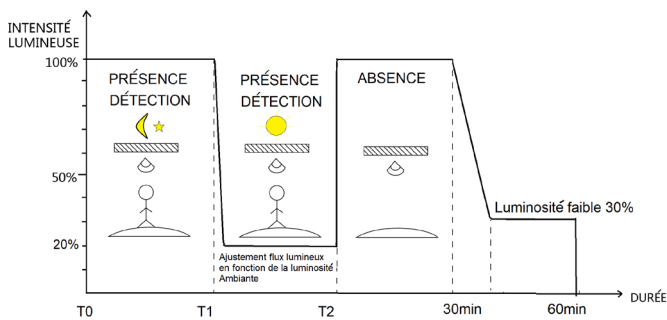

Selection du modes de fonctionnement du détecteur

SELECTEUR	MODE	PRESENCE	VARIATION LUMINOSITE
	0	OFF	OFF
1	ON	ON	OFF
2	ON	ON	ON
3	OFF	OFF	ON

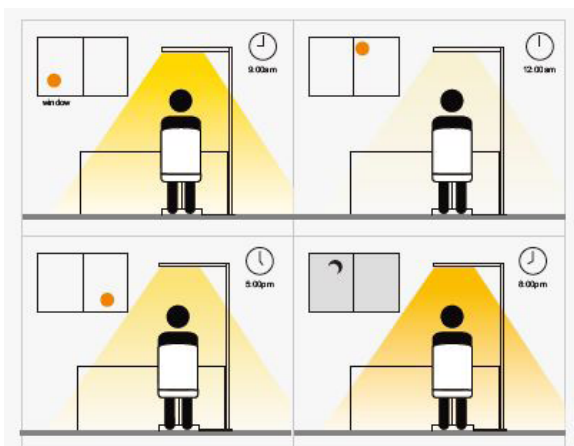

Garantie 5 ans selon les conditions générales de garantie. Nous nous réservons le droit de changer les données techniques sans notification préalable. Tolérance initiale des flux lumineux et puissance utile a +/- 10%. Les valeurs sont données pour une alimentation de 230V et température ambiante de 25°C). Les valeurs de maintien de flux lumineux ne tiennent compte que des performances de la LED et excluent le vieillissement naturel et détérioration des matériaux constituant les produits. Luminaires durables conçus pour réduire l'impact sur environnement tout au long du cycle de vie.

Version : 1742021