


Hyfrequency sensor 0-10V and corridor fonction to be integrated inside luminaire...

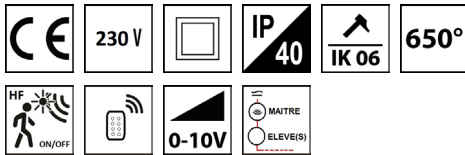

WARRANTY & COMPLIANCY

Warranty	5 ans
CE marking	CE
Norms	2014/53/UE
Compatible surface inflammable	F

ACCESSORIES

Management interface (remote)	Remote basic [PROGIRMC087V] Remote programmation [PROGIRMC-087MH10]
-------------------------------	--

COMPATIBILIRT

THis sensor is install in this follow product family	PREAVIS HF Ref «PRE» - DRAKKAR II PREAVIS HF
--	---

GENERAL SPECIFICATION

Product	Détecteur IR
Family	DETECT 0-10V HF DETMC087V
Voltage supply	AC220-240V +/-6% 50/60Hz
Operating temperature range Ta	-20/+35 °C
Life time @ 25°C	50000hrs
Cycle on/off	∞
Driver defective rate @ 5000hrs	0,5%
Sensor mode	Hyperfrequence 5.8GHz
Sensor function	HF Présence et luminosité
Body material	ABS/PC
Seting up interface	Remote basic [PROGIRMC087V] Remote programmation [PROGIRMC-087MH10]
Installation	standalone
Power supply and connection	Push connector (L, N, L', -, +)
Detection area	Max H3xDia6m (plafonnier) Max L8m (applique)
Accessories	Mounting fixation set
Maintenance & cleaning	Antistatic tissu; Humid tissu

TECHNICAL DATA

Reference	Capacity Max (W)	Standby (W)	Color	Fixation distance (mm)	Dimensions (mm)
DETCM087V	600W	<0.9W	Blanc	105	110x35x22

SENSOR SETTING



Référence	Timing	Distance	Luminosity	Standby timing	Low level luminosity
DETCM087V	5-30sec-1-3-5-10-20-30min	25-50-75-100%	5-15-30-50-100-150-Off	0-10s-1-3-5-10-30min/+∞	10%-20%-30%-50%

DIMMING MANAGEMENT

Référence produit	Dimming	Protocole
DETCM087V	0-1-100%	1-10V



DETECTION AREA

Mounting height: 3m
Detection area: 100%/75%/50%25%

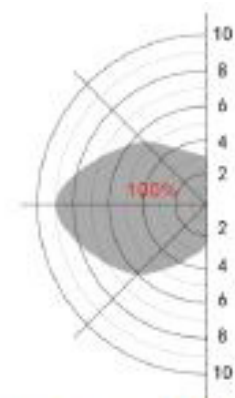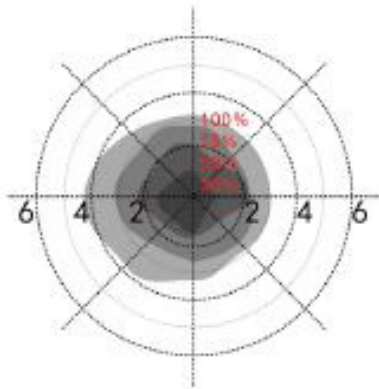

Moving speed: 0.3m/s

Mounting height: 6m
Detection area: 100%/75%

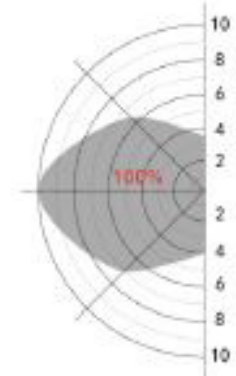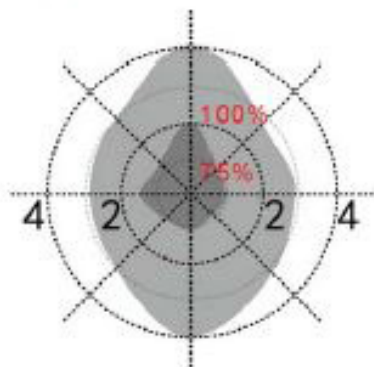

Moving speed 0.3m/s

ACCESSORIES







PROGIRMC087VMH10



PROGIRMC087V

GRAPHICS

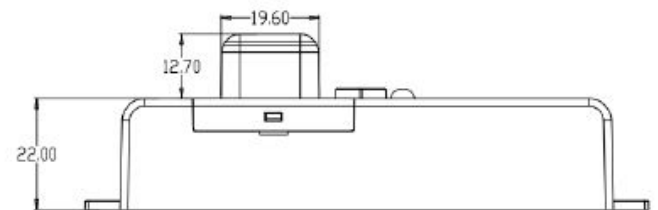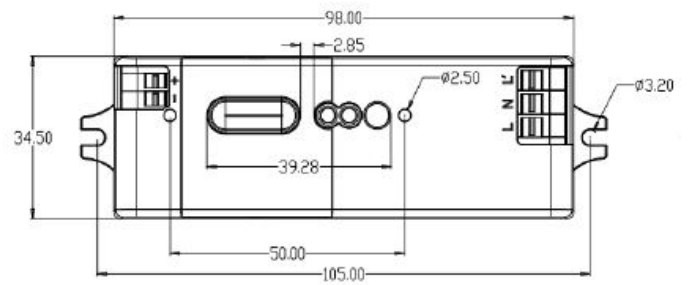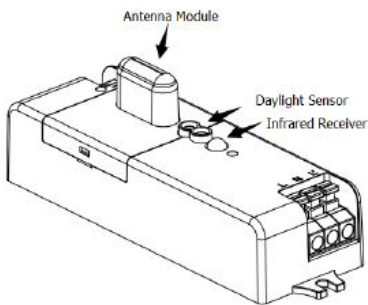

WIRING DIAGRAMS

